


Technical specifications:

Rototilt RT10

Fixed upper - S40 coupler

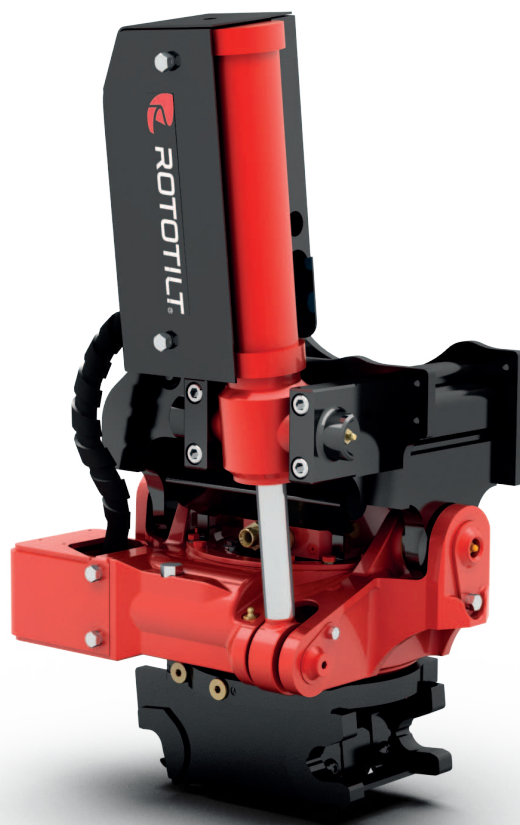

Rototilt RT10 Fixed-S40

RT10 Fixed-upper S40 Coupler	
Min/max machine weight	1,500 - 3,500 kg / 3,310 - 7,715 lb
Max bucket volume	0.12 m ³ / 0.16 yd ³
Max bucket width	1.0 m / 39.4 in.
Max break out force	35 kN / 7,870 lbf.
Weight (approx.)	110 kg / 243 lb
Tilt angle	2 x 40°
Rotation	unlimited
Rotation speed	1 revolution per 7 seconds @ 15 l/min (3.96 gpm)
Operating pressure	21 MPa / 3045 psi
Max return line pressure	2 MPa / 290 psi
Rotation torque	approx. 1,700 Nm / 1,255 ft.lb @ 21 MPa / 3045 psi
Tilt torque	5,800 Nm / 4,280 ft.lb
Recommended hydraulic flow	20 l/min / 5.28 gpm

Fixed-S40 mm / in	
A	468 / 18,4
C	317 / 12,5
D	300 / 11,8
E	Ø40 / Ø1,6
G	289 / 11,4
H	676 / 26,6
I	198 / 7,8
J	170 / 6,7
K	127 / 5

